
Name: Itima Miracle Biri Matric No: 17/ENG04/034 Department: Elect/Elect IN THOMPSELL II Define mornanion whoming Mathematical modelling to defined as the act of Les-Outpoind of shall are the description of could and language. It withe process of serving up a milel, saving it walke way come installed by a work in Syndrical or other terms. @ only in unique of opening waterwayon works to ashuayud shhau Transition from the physical statution (thysical system) on its mathematical made to install mathematical made) Degree regression without 3 interpreting, and simulating the model. 1 A themometer that Initially roads 10°C is used to measure the temperature of a system. The temperature of the thermineter a discorded to be 20°C after 5 mins of moening it into the Stytem, if the actual temperature of the system is 25°C i) develop a model for the system. @ smulax the developed modes for the L=0 to Ls power using a step time of their with the all of microsoft excel. M obtain the dynamic Poponse of the yelem with the out of material without wing syons command, for too to to bomin wing a step of train. M wing either the dynamic response, which the stady-stay temperature of the system, and @ Ming the developed model equation revolunte the temper abuse of the thermometer as' t -> &.

```
actual
(1) LOTG) be the temperature of the system and for the tem.
  perature, by theration's law of abouting.
  The De 13 variable separable
  Integrating both sides
      (G-TA) = SKidt
   inG-FA) = Mt + C
F-TA = ene+c
   T-Thz enecc
Czec. -- w the initial condition
     TO = TA+ COM
  To the yor C, giving the Initial condition
      TG) = TA + CC
    10 2 25 + C
    C 210-25
    1 -2-15
  1. TOH 295-158m
   p tyly v
   At t 2 5 mans, T 2 20°C
     20= 25-15ent
   -5 2-15ehr
    1 5 GMF
    In 18 = BK
      K = In/s
         2 -092.
```

1.T225-15e-0.22t

X(TIME)	Y=25-15*EXP(-0.22*A2)
0	10
1.5	14.216144
3	17.24722998
4.5	19.42634963
6	20.99297047
7.5	22.11925137
9	22.92896144
10.5	23.51108123
12	23.92958096
13.5	24.23045035
15	24.44675249
16.5	24.60225723
18	24.71405329
19.5	24.79442612
21	24.85220806
22.5	24.89374887
24	24.92361354
25.5	24.94508396
27	24.96051956
28.5	24.97161657
30	24.97959448
31.5	24.98532999
33	24.98945338
34.5	24.99241778
36	24.99454897
37.5	24.99608112
39	24.99718263
40.5	24.99797452
42	24.99854384
43.5	24.99895313
45	24.99924738
46.5	24.99945892
48	24.99961101
49.5	24.99972034

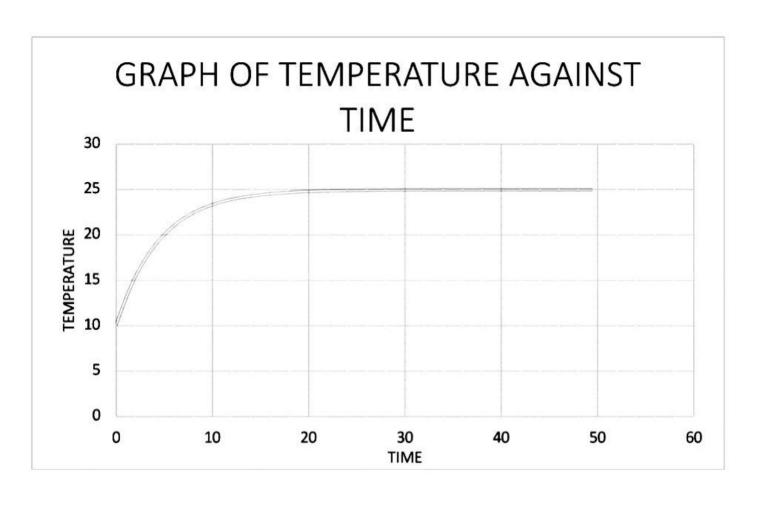

```
Codes
Commandandaw
Clarall
Clc
Close all

to the to 10.5:50

To 25-15 exp(-0.22t)

To 2 Subs(T)

Nate (Time (3)')


Ylate (Time (3)')

Ylate (Time (3)')

Title (Thraph of Temperature (T) agains Time (H')

grid on

grid minor.
```

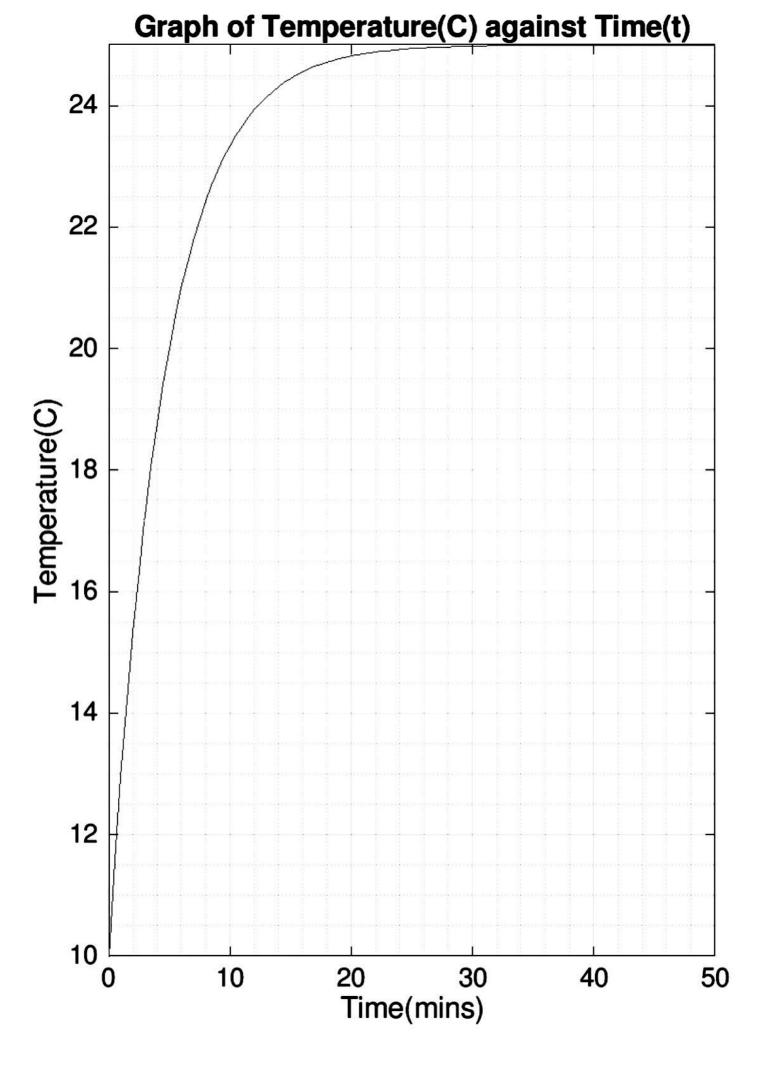

	W 91001
(4)	The Stady State value of the temperature is 25°C at 30
	mins of the exponential approach.
(4)	AST tends to Inching The temperature recommended
	As t tends to inpinity, the temperature approaches the steady state value which is 25°c.
	say said value which to us c.
(11)	Tz24.9
*	Recall
•	1 = 1 - CPM
	24,9 = 25 -150 -000
	24.9-25 = - 13e-0.22t
	=01/2-15P-012et
	-0.1 = e-0.22t
	-15
	1 z e-ant
	150
	In 150 2 -0.82t
	t 2 -5.01 = 22.77 min
	-022