


NAME: Yahaya Abba Agbo
MATRIC NUMBER : 19/MHS01/439
DEPARTMENT: MBBS
COURSE CODE: PHY 102

1a. Charging by Induction:

Electric charges can be obtained on an object without touching it, by a process called electrostatic induction.

Consider a positively charged rubber rod brought near a neutral (uncharged) conducting sphere that is insulated so that there is no conducting path to ground as shown below. The repulsive force between the protons in the rod and those in the sphere causes a redistribution of charges on the sphere so that some protons move to the side of the sphere farthest away from the rod (fig.1.3a). The region of the sphere nearest the positively charged rod has an excess of negative charge because of the migration of protons away from this location. If a grounded conducting wire is then connected to the sphere, as in (fig.1.3b), some of the protons leave the sphere and travel to the earth. If the wire to ground is then removed (fig 1.3c), the conducting sphere is left with an excess of induced negative charge. Finally, when the rubber rod is removed from the vicinity of the sphere (fig. 1.3d), the induced negatively charge remains on the ungrounded sphere and becomes uniformly distributed over the surface of the sphere.

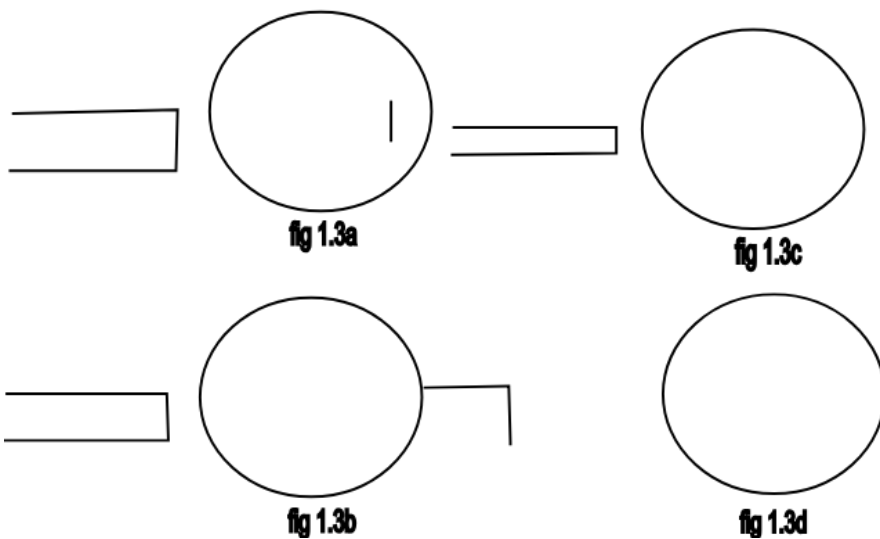

$$b) q_1 + q_2 = 5 \times 10^{-5} \text{ C}, \quad q_1 = 5 \times 10^{-5} - q_2$$

$$F = \frac{k q_1 q_2}{r^2}, \quad 1.0 = \frac{9 \times 10^9 q_1 q_2}{2^2}$$

$$4 = 9 \times 10^9 \times (5 \times 10^{-5} - q_2) q_2$$

$$4 = 4.5 \times 10^5 q_2 - 9 \times 10^9 q_2^2$$

$$-9 \times 10^9 q_2^2 + 4.5 \times 10^5 q_2 - 4 = 0$$

Using the Quadratic formula, $x = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$

$$q_2 = \frac{-4.5 \times 10^5 \pm \sqrt{(4.5 \times 10^5)^2 - 4(-9 \times 10^9)(-4)}}{2(-9 \times 10^9)}$$

$$q_2 = \frac{4.5 \times 10^{-5} \pm \sqrt{5.8 \times 10^{10}}}{-18 \times 10^9}$$



$$q_2 = 1.156 \times 10^{-5} \quad q_2 = \frac{-4.5 \times 10^5 \pm 241867.7}{-18 \times 10^9}$$

$$q_2 = 1.156 \times 10^{-5} \text{ or } 3.84 \times 10^{-5} \text{ C}$$

$$q_1 = 1.156 \times 10^{-5} \text{ C}$$

$$q_2 = 3.84 \times 10^{-5} \text{ C}$$

c)

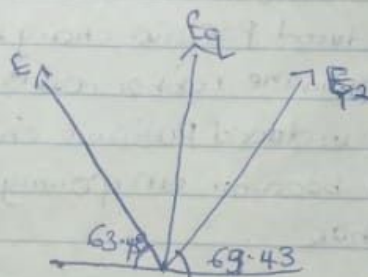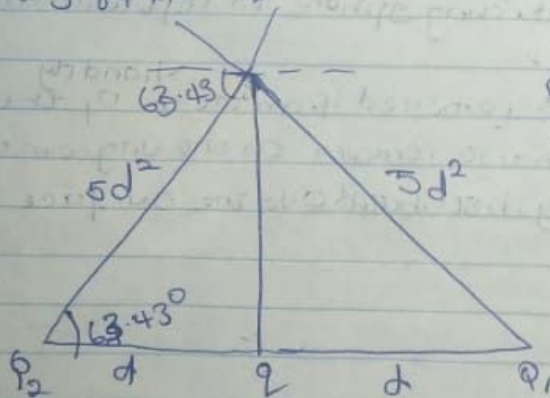

$$d = 0.5$$

$$\sqrt{3d^2 + d^2} = d\sqrt{10}, \quad \tan \theta = \frac{2d}{d}$$

$$\tan^{-1}(2) = 63.43^\circ$$

$$E_1 = \frac{k q_1}{r^2} = \frac{9 \times 10^9 \times (8 \times 10^{-6})}{(d\sqrt{5})^2}$$

$$= \frac{9 \times 10^9 \times 8 \times 10^{-6}}{(\sqrt{5}/2)^2} = 57600 \text{ N/C}$$

$$\frac{kQ_2}{r^2} = \frac{9 \times 10^9 \times (8 \times 10^{-9})}{(d\sqrt{5})^2} = 57600 \text{ N/C}$$

$$\frac{q}{r^2} = \frac{9 \times 10^9 \times q}{(2d)^2} = \frac{9 \times 10^9}{4d^2} q = 9 \times 10^9 q \text{ N/C}$$

	θ	X-Component	Y-Component
600 N/C	63.43°	$57600 \cos 63.43$ $= -25764$	$57600 \sin 63.43$ $= +51516.8$
600 N/C	63.43°	$57600 \cos 63.43$ $= +25764$	$57600 \sin 63.43$ $= +51516.8$
$9 \times 10^9 q \text{ N/C}$	90°	$9 \times 10^9 q \cos 90$ $= 0$	$9 \times 10^9 q \sin 90$ $= 9 \times 10^9 q$
		$\sum F_x = 0$	$\sum F_y = 103033.6$ $9 \times 10^9 q$

$$= \sqrt{\sum E_x^2 + \sum E_y^2}$$

Energy at point P = 0

$$0 = \frac{1}{2} \left(\frac{103033.6}{9 \times 10^9} + 9 \times 10^9 q \right)^2$$

$$0 = \frac{1}{2} \left(\frac{103033.6}{9 \times 10^9} + 9 \times 10^9 q \right)^2$$

$$9 \times 10^9$$

$$1.144817778 \times 10^{-5}$$

$$-11.4 \times 10^{-6}$$

$$11.4 \text{ nC}$$

3a.

Volume charge density, $= dQ/dV$ $dQ = \rho dV$

Surface charge density, $= dQ/dA$ $dQ = \sigma dA$

Linear charge density, $=dQ/dL$ $dQ=\lambda dL$

3b. ELECTRIC POTENTIAL DIFFERENCE

The electric potential difference between two points in an electric field can be defined as the work done per unit charge against electrical forces when a charge is transported from one point to the other. It is measured in Volt (v) or Joules per Coulomb (J/C). Electric potential difference is a scalar quantity.



Consider the diagram above, suppose a test charge q_0 is moved from point A to point B along an arbitrary path inside an electric field E . The electric field E exerts a force $F=q_0E$ on the charge as shown in fig 3.1. To move the test charge from A to B at constant velocity, an external force of $F=-q_0E$ must act on the charge. Therefore, the elemental work done dW is given as:

$$dW=F \cdot dL \quad (1)$$

But

$$F=-q_0E \quad (2)$$

Substituting equation (2) in (1) yields

$$dW=-q_0EdL \quad (3)$$

Then total work done in moving the test charge from A to B is:

$$W_{(AB)} = -q_0 \int_A^B E \cdot dL \quad (4)$$

From the definition of electric potential difference, it follows that:

$$V_B - V_A = W_{(AB)} / q_0 \quad (5) \text{ Putting equation (4) in (5) yields}$$

$$V_B - V_A = - \int_A^B E \cdot dL \quad (6)$$

SECTION B.

4a. magnetic flux is defined as the strength of the magnetic field which can be represented by line of forces. It is represented by the symbol Φ . mathematically given as $\Phi = \int \mathbf{B} \cdot d\mathbf{A}$

$$46) m = 9 \times 10^{-31} \text{ kg}$$

$$r = 1.4 \times 10^{-7} \text{ m}$$

$$B = 3.5 \times 10^{-1} \text{ weber/m}^2$$

Cyclotron frequency = angular speed.

$$\omega = \frac{v}{r} = \frac{qB}{m}$$

$$\omega = \frac{qB}{m} = \frac{1.6 \times 10^{19} \times 3.5 \times 10^{-1}}{9 \times 10^{-31}}$$

$$\omega = 622222222222 \cdot 222222 \text{ T}^{-1}$$

4c. In the question we were given parameters such as

i. mass of the electron = $9.11 \times 10^{-31} \text{ kg}$

ii. A radius of $1.4 \times 10^{-7} \text{ m}$

iii. magnetic field of 3.5×10^{-1} weber/meter square

and you are asked to find the cyclotron frequency

which is equal or the same thing as angular speed. it is called cyclotron frequency because it is a frequency of an accelerator called cyclotron.

Recall that angular speed is given as $\omega = vr = qBm$

$$\text{Substituting we have } \omega = vr = qBm = 1.6 \times 10^{-19} \times 3.5 \times 10^{-10} \times 9.11 \times 10^{-31}$$

$$qBm = 1.6 \times 10^{-19} \times 3.5 \times 10^{-10} \times 9.11 \times 10^{-31} = 62222222222.22222 \text{ T}^{-1}$$

SO since cyclotron frequency is equal to angular speed the cyclotron frequency is equal to $= 62222222222.22222 \text{ T}^{-1}$, having a unit as $1/\text{T}$ which is equal to the unit of frequency dimensionally.

5b. Biot-savart law states that the magnetic field is directly proportional to the product permeability of free space (μ), the current (I), the change in length, the radius and inversely proportional to square of radius (r^2). It can be represented mathematically by

$$dB = \frac{\mu_0 I dl r \sin \theta}{r^2}$$

where μ_0 is a constant called Permeability of free space.

$$\mu_0 = 4 \times 10^{-7} \text{ T.mA}$$

The unit of B is weber/metre square

5b. Magnetic Field of a Straight Current Carrying Conductor

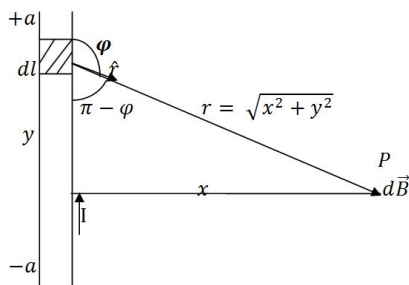


Fig 1: A section of a Straight Current Carrying Conductor

Applying the Biot-Savart law, we find the magnitude of the field dB

$$B = \frac{\mu_0 I a d \sin \theta}{r^2}$$

$$\sin \theta = \sin \theta$$

$$\therefore B = \frac{\mu_0 I a d \sin \theta}{r^2}$$

From diagram, $r^2 = x^2 + y^2$ (Pythagoras theorem)

$$B = \frac{\mu_0 I a d \sin \theta}{x^2 + y^2} \quad (*)$$

$$\text{But } \sin \theta = \frac{x}{\sqrt{x^2 + y^2}} \quad (**)$$

Substituting (**) into (*), we have

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{dy}{(x^2 + y^2)^{3/2}}$$

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{dy}{(x^2 + y^2)^{3/2}}$$

Recall $dl = dy$

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{dy}{(x^2 + y^2)^{3/2}}$$

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{dy}{(x^2 + y^2)^{3/2}} \quad (***)$$

Using special integrals:

$$dy(x^2 + y^2)^{3/2} = \frac{1}{2} \frac{d(x^2 + y^2)}{(x^2 + y^2)^{1/2}}$$

Equation (***) therefore becomes

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{1}{2} \frac{d(x^2 + y^2)}{(x^2 + y^2)^{1/2}}$$

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{1}{2} \frac{d(x^2 + y^2)}{(x^2 + y^2)^{1/2}}$$

$$B = \frac{\mu_0 I a}{4\pi} \int_{-a}^a \frac{1}{2} \frac{d(x^2 + y^2)}{(x^2 + y^2)^{1/2}}$$

When the length $2a$ of the conductor is very great in comparison to its distance x from point P , we consider it infinitely long. That is, when a is much larger than x ,

$$(x^2 + a^2)^{1/2} \approx a, \text{ as } a \rightarrow \infty$$

$$\therefore B = \frac{\mu_0 I}{2\pi x}$$

In a physical situation, we have axial symmetry about the y -axis. Thus, at all points in a circle of radius r , around the conductor, the magnitude of B is

$$B = \frac{\mu_0 I}{2\pi r} \quad (#)$$

Equation (#) defines the magnitude of the magnetic field of flux density B near a long, straight current carrying conductor.